

Intelli Fixed Lens Series


2094/251B-MDE1

2 Megapixel IP Dome Camera,
Fixed Lens



Features :

- Resolution: 2MP (1920 × 1080).
- ICR auto switch, true day / night vision.
- 3D DNR, WDR, HLC, BLC, smart IR.
- H.265+, H.264+ compression - Reduce storage & bandwidth.
- Supports PoE - IEEE802.3af.
- Built-in Audio Microphone.
- Built-in SD Card Slot supports up-to 256gb.
- Reset Button & local 12Vdc input / output option.
- Vandal Resistant metal casing.
- Ip66 Ingress Protection - fully protected against dust and water.
- Support Tripple stream.
- Supports remote monitoring through professional UVSpro Video management Software (VMS).
- Support remote monitoring by smart phones & Tablet for Android & iOS application - iUVS.
- Supports Onvif profile for 3rd party integration.
- STQC Approved, BIS ER Certified.



day & Night



WDR



HLC



AI Analytics



BLC



Light Explorer



Defog / Video Mask & Tamper



H.265+

H.265+



SD CARD SLOT



PoE


PoE



IP67

IP67





2094/251B-MDE1

2 Megapixel IP Dome Camera, Fixed Lens



Specifications


| Model | 2094/251B-MDE1 |
|-----------------------------------|---|
| Imaging Sensor | 1/2.7" Progressive CMOS |
| Effective Pixels | 2MP 1920(H)×1080(V) |
| Min. Illumination | Color 0.005lux @ F1.2(AGC ON) ; B/W 0 lux @ IR ON |
| Lens Type | Fixed Lens M12: 2.8 mm (Optional - 4mm, 6mm, 8mm) |
| Field of View FOV | 2.8 mm: Horizontal - 103°, V - 56°, Diagonal - 121° |
| DORI | 2.8 mm: D: 45 m, O: 18 m, R: 9 m, I: 4 m |
| Viewable Length IR | Up to 40m |
| Backlight Compensation | Off / On (5 Zone) |
| Motion Detection | Off/On (8 Level) |
| Wide Dynamic Range | 120db DWDR |
| Digital Noise Reduction | 3D DNR |
| Day & Night | IR cut filter with auto switch (Day/Night / Image / Schedule) |
| White Balance | Auto / Manual |
| Electronic Shutter Speed | 1/5 ~ 1/20000s |
| On-Board Storage | Micro SD slot, up to 256GB |
| Alarm | NA |
| Audio | Built-in Microphone |
| Hardware Reset | Yes |
| Smart Feature | Face Recognition, Pedestrian & Vehicle, Intrusion, Line Crossing, Object Detection, Crossing Counting, Heat Map, Crowd Density, Queue Length, License Plate, Rare Sound, Intrusion, Region Entrance, Region Exiting |
| Smart Alarm | Defog, Video Mask (TAMPER), SD card full, SD card error |
| General Function | Watermark, IP address filtering, video mask, heartbeat, illegal login lock |
| Ethernet | RJ45(10/100BASE-T) |
| Video Compression Format | H.265 / H.264 / H.265+ / H.264+ |
| Stream Resolution | Main Stream : (1920 x 1080), (1280 x 960), (1280 x 720) Sub Stream : (1280 x 720), (640 x 480), (320 x 240) Third Stream : (640 x 480), (320 x 240) |
| Video Quality Adjustment | 256Kbps ~ 8Mbps |
| Bitrate control method | CBR/VBR |
| IP | Ipv4 |
| Protocol | TCP/IP,HTTP,DHCP,DNS,DDNS,RTP/RTSP, SMT,NT,HTTPS,FTP |
| Application Programming Interface | ONVIF (Profile S/G/T/M) |
| Operating Conditions | -35° ~ +60°C / less than 90% RH |
| Ingress Protection & Tamper | IP67 & IK10 |
| Input Voltage / Current | POE(IEEE802.3af) / D12V |
| Power Consumption | 5W |
| Material | Metal |

- Product Manufactured and Made in India
- The manufacturer reserves the right to change product features to deliver technical improvements or comply with new regulations.
- Urmet is a registered trademark of Urmet S.p.A., Via Bologna, 188/C - 10154, Torino, Italy

AI - 3rd GENERATION

- Face detection
- Heat Map / Crowd Density Detection / Queue length detection
- Object Abandon / Object Lost
- Human / Vehicle Classification
- Tripwire / Perimeter / Line Crossing / Loitering / Intrusion / Region Entrance & Exit
- Rare Sound Detection
- Video Tampering

DIMENSIONS

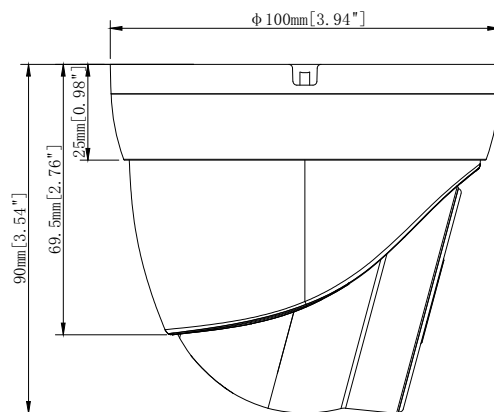

Video Management Software

iUVS pro



App



Manufactured & Marketed By:
Alba Urmet Communication And Security Private Limited

285 & 275, Udyog Vihar - IV, Gurgaon - 122001, Haryana, India

www.albaurmet.com

M : sales@albaurmet.com ; T : +91-9625-510-510

ALBA
urmet
Security . IOT . Technology .